

Californian

Reflections



M-Drive



LiquidFX



NeckFlex Pillow



UltraPure



BioForm Lounge

Shell Colors



UltraLife Jasper Obsidian Opal Graphite



Tanzanite Moonstone Sunstone Sand

Architectural Trim

ENVIROTECT



Tan Brown Gray



Oak Cherry Cattails

Specifications

Dimensions **92" W x 92" H x 36" H**

Seating **6**

Jets **37 jets**

Electrical **240V, 30/40/50A**

NeckFlex Jet Pillows **1**

Water Management **UltraPure**

Full-Foam Insulation **Standard**

Liquid FX **Optional**

Stereo **Optional**

Features



Pumps



Persons



Jets



NeckFlex Jet Pillow



BioForm Lounge



UltraPure



M-Drive



Liquid FX (Optional)



DIMENSION ONE SPAS®


www.d1spas.com

General		
Shape	Square	
Seating Capacity	6	
Shell Material	Ultralife™ / Granitex™ / Geloy®	
Dimensions	92" x 92" x 35 1/2" H / (234cm X 234cm x 90cm H)	
Corner Radii	16" (41 cm)	
Water Capacity	350 Gallons (1324 Liters)	
Dry Weight	882 lbs (400 kg)	
Shipping Weight	Domestic 882 lbs (400 kg) - Export 932 lbs (423 kg)	
Full Weight	3800 lbs (1723 kg)	
Skirt Material	Domestic Synthetic - Export Wood or Synthetic	
Poly Floor	Yes	
Water System		
Water Treatment System	Ultra Pure™	
Plumbing Systems	3	
Filters/Coverage	2 / 75 sq. ft.	
Gate Valves	4	
VCR Jet® - Air Adjustable/Directional	2	
VCR Jet® - Rotator	6	
VCR Jet® - Dual Rotator	4	
VCR Jet® - Multi Port Spinner	5	
VCR Jet® - Mini Rotator	13	
VCR Jet® - Mini Directional	2	
VCR Jet® - Euro Directional	0	
VCR Jet® - Euro Rotator	0	
VCR Jet® - Mini Directional in NFJ	4	
Typhoon Jet	1	
Ozone Jet	1	
Heater Return Jet	1	
Pump Returns	4	
Diverter Valves	1	
Floor Drains	1	
Skimmer	8" Weir	
Special Features		
Dynamic Massage Sequencer w/ control panel	No	
NeckFlex® Jet Pillows	1	
Headrest Pillows	2	
Stereo system	Optional Poly-Planar	
Water Feature	Optional with LFX package	
Water Feature Volume control	Optional with LFX package	
Cup Holders	3	
Tactile Therapy	Foot & hand	
Pump Information		
	Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP	4.0 (2.5) Hp	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	Two / Dual	Two / single
Circulation pump	1	1
Fountain pump	1 with optional LFX package	1 with optional LFX package
Electrical System		
	Domestic (60Hz)	Export (50Hz)
Voltage	240	240
Amperage	50/40/30	1X16 / 2X16 / 1X32
Heater	FastFlo 2.7,4.0,5.5 kW	FastFlo 2.9 kW
Thermostat	Electronic	Electronic
Light	Multi color LED or Optional LFX package	Multi color LED or Optional LFX Package
Control System	MSPA-MP-D17-NON LFX, MSPA-MP-D18 LFX	MSPA-MP-CE-D17-N/LFX, -D18 LFX
Upper Control (programable)	M-Drive with Scrolling Message Center	M-Drive with Scrolling Message Center
Auxiliary Upper Control	Yes	Yes




Note: 1. Subject to change without notice.

Californian Architectural Specification

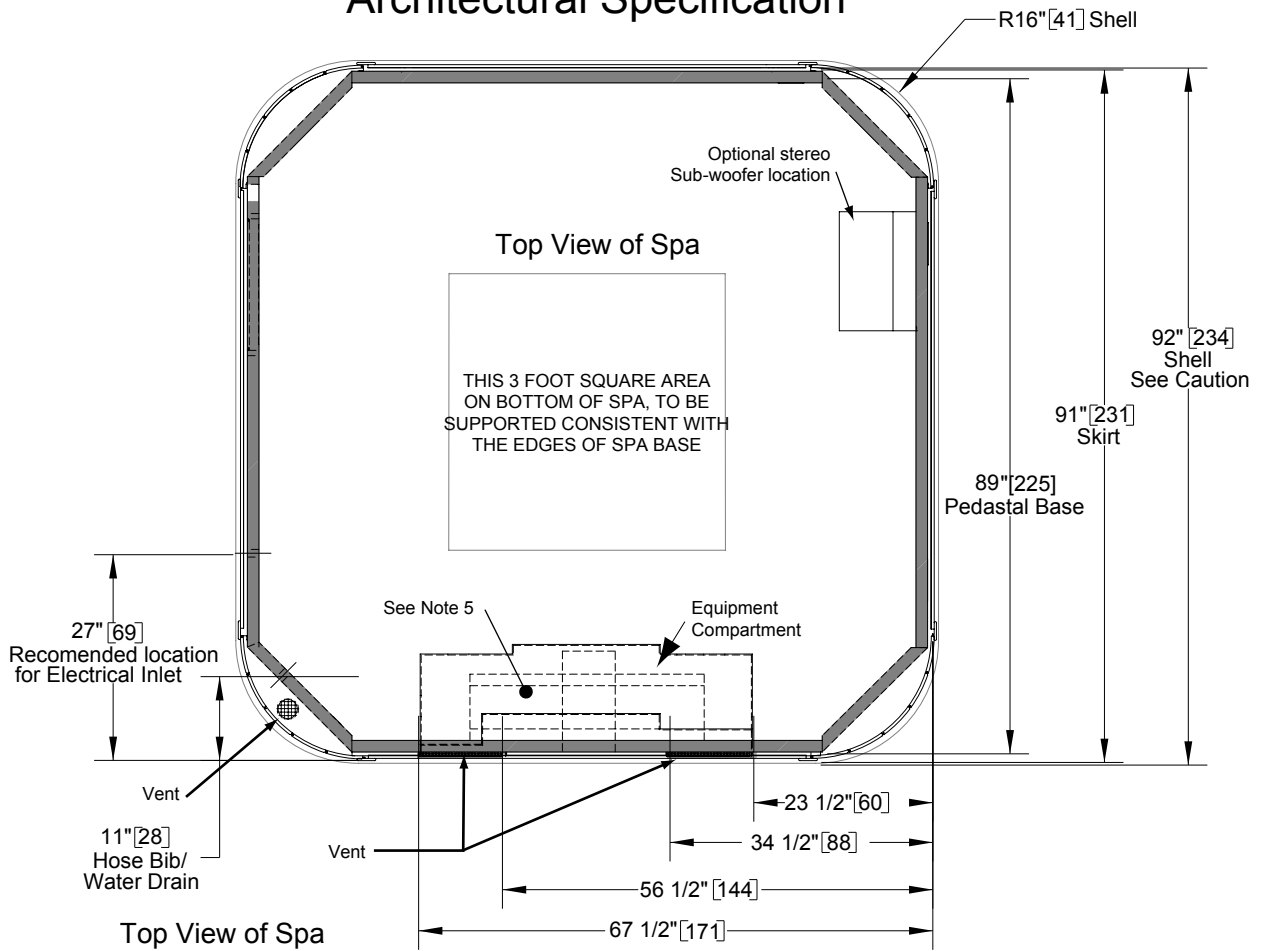

Top View of Spa

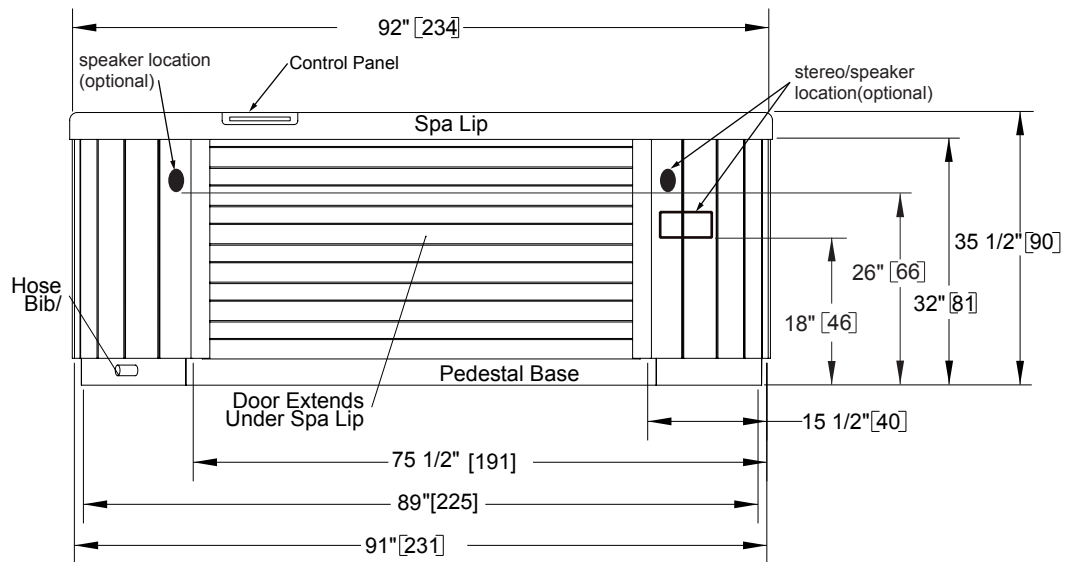

Front View of Spa

- Note: 1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. For E-Z lifter installation allow 18" clearances on the backside of the spa.
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details
 5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment(drill from the inside compartment out).

Dimensions shown as inches and [centimeters] - XX" [cm]

Caution:
 Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.