

Triad

Reflections



M-Drive



UltraLounge



NeckFlex Pillow



UltraPure



Massage Sequencer

Shell Colors



UltraLife Jasper Obsidian Opal Graphite



Tanzanite Moonstone Sunstone Sand

Architectural Trim

ENVIROTECT



Tan Brown Gray

TERRACINA SOMMERSET



Oak Cherry Cattails

Specifications

Dimensions **84" L x 67" W x 30" H**

Seating **3**

Jets **23 jets**

Electrical **240V, 30/40A**

NeckFlex Jet Pillows **1**

Water Management **UltraPure**

Full-Foam Insulation **Standard**

Stereo **Optional**

Features



Pumps



Persons



Jets



NeckFlex Jet Pillow



UltraLounge



UltraPure



M-Drive



DIMENSION ONE SPAS®

www.d1spas.com

General	
Shape	Rectangular
Seating Capacity	3
Shell Material	Ultralife™ / Granitex™ / Gelov®
Dimensions	84" x 67" x 30½" H / (213cm X 170cm x 77cm H)
Corner Radii	16" (41 cm)
Water Capacity	200 Gallons (757 Liters)
Dry Weight	530 lbs (240 kg)
Shipping Weight	Domestic 530 lbs (240 kg) - Export 580 lbs (263 kg)
Full Weight	2200 lbs (1000 kg)
Skirt Material	Domestic Synthetic - Export Wood or Synthetic
Poly Floor	Yes



Water System	
Water Treatment System	Ultra Pure™
Plumbing Systems	1
Filters/Coverage	2 / 75 sq. ft.
Gate Valves	2
VCR Jet® - Air Adjustable/Directional	3
VCR Jet® - Rotator	4
VCR Jet® - Dual Rotator	2
VCR Jet® - Multi Port Spinner	0
VCR Jet® - Mini Rotator	6
VCR Jet® - Mini Directional	6
VCR Jet® - Euro Directional	0
VCR Jet® - Euro Rotator	0
VCR Jet® - Mini Directional in NFJ	4
Typhoon Jet	0
Ozone Jet	1
Heater Return Jet	1
Pump Returns	2
Diverter Valves	0
Floor Drains	1
Skimmer	8" Weir



Special Features	
Dynamic Massage Sequencer w/ control panel	Yes
NeckFlex® Jet Pillows	1
Headrest Pillows	2
Stereo system	Optional Poly-Planar
Water Feature	n/a
Water Feature Volume control	n/a
Cup Holders	2
Tactile Therapy	Foot & hand

Pump Information	Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP	4.0 (2.5) Hp	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	One / Dual	One / single
Circulation pump	1	1
Fountain pump	n/a	n/a

Electrical System	Domestic (60Hz)	Export (50Hz)
Voltage	240	240
Amperage	40/30	1X16 / 2X16 / 1X32
Heater	FastFlo 2.7,4.0,5.5 kW	FastFlo 2.9 kW
Thermostat	Electronic	Electronic
Light	Multi color LED	Multi color LED
Control System	MSPA-MP-D17	MSPA-MP-CE-D17
Upper Control (programmable)	M-Drive with Scrolling Message Center	M-Drive with Scrolling Message Center
Auxiliary Upper Control	No	No

Note: Subject to change without notice.

Triad Architectural Specification

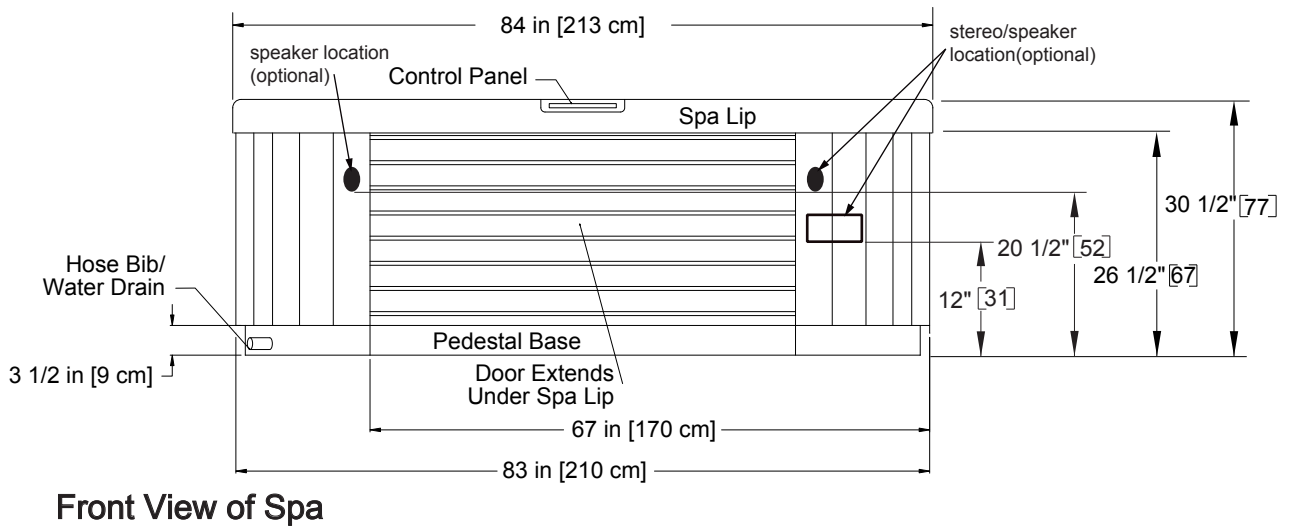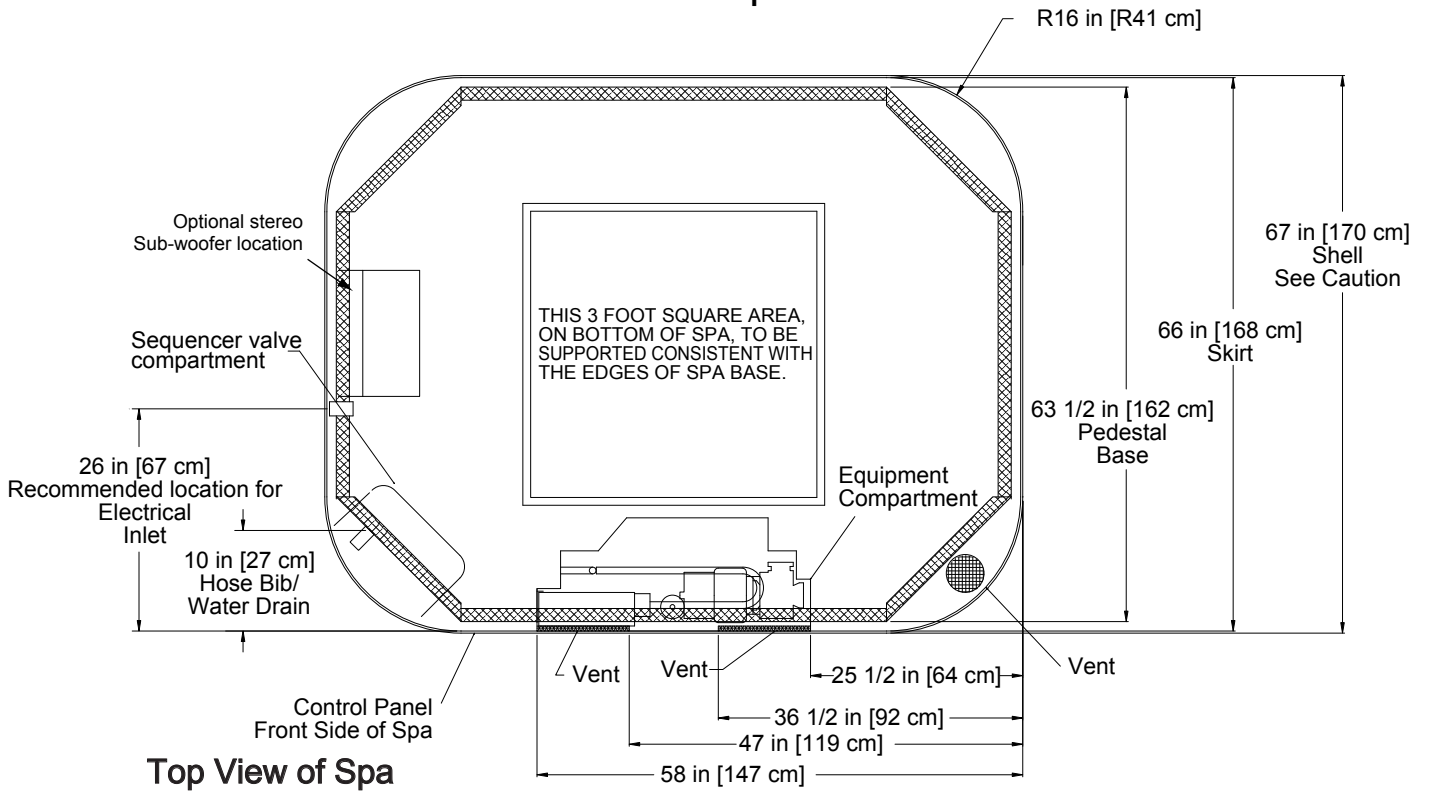

Note: Subject to change without notice.

1. Engineering specs may differ slightly from brochure.
2. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
3. Alternative cabinets may add significant weight. Ask your dealer for exact details
4. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment(drill from the inside compartment out).

Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.